

Technical Supplement

Subject: Explanation of the functions within Z-Wave® Maintenance

NOTE: There are 2 features in this programming location.

- The first feature allows the removal of any Z-Wave® module that has failed or where the “Add/REMOVE” button is no longer working.

If the module is still in the home, it can be replaced and re-added to the system as the same device number. This is very helpful if the Z-Wave module is integrated into one or more Scenes or Action.


The second possibility could be that the Z-Wave® module is missing from the home; removing it will make it not appear on the Z-Wave® Room list of modules.
- The second feature that can be done from this location is the ability to do a complete back up of the Z-Wave® module programming.

The backup can be sent to the DLX900 software and stored there; it can then be downloaded back to the panel when it is replaced. This back up is also stored locally on the panel. In the event of an issue with the Z-Wave® module programming, it can be reset back to the last backup state.

Failed Device Functions

1. **Replace**, is used to replace a failed Z-Wave® device that is damaged or has stopped functioning.
2. **Remove**, is used to permanently remove the failed Z-Wave® device.
3. **Cancel**, is used to stop either one of these processes.


To Remove a device use the drop down menu at the bottom to select the device.

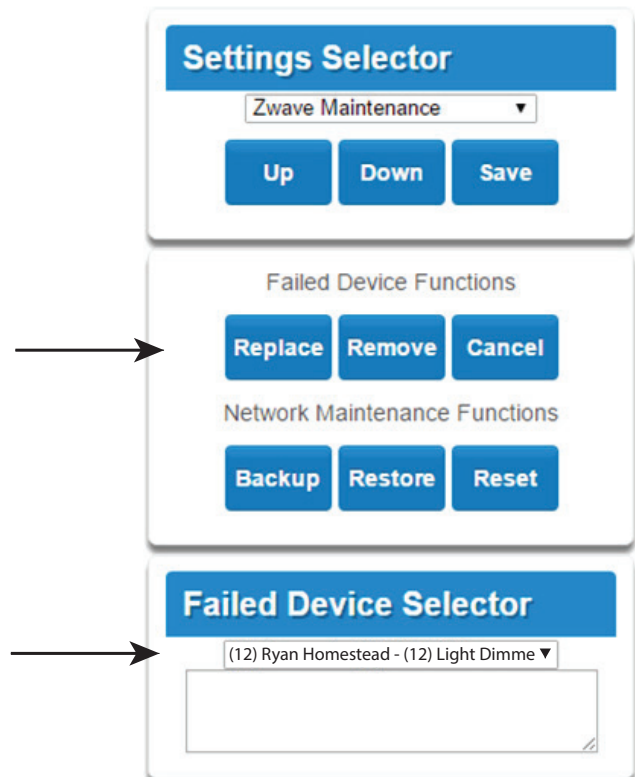

Network Maintenance Functions

1. **Backup**, this will perform the backup operation, which is stored on the panel.
2. **Restore**, this will reload the Z-Wave® programming that was stored on the panel.
3. **Reset**, defaults all the Z-Wave® Programming.

NOTE: When using the DLX900 software, the Z-Wave® database can be backed-up when a full panel upload is done. Likewise, when a full panel download is done, the Z-Wave® database configuration will also be sent.

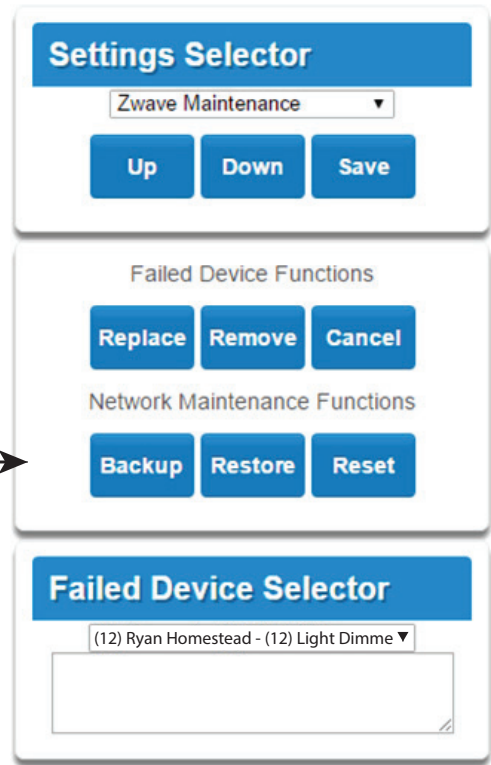

A160177

Z-Wave is a registered US trademark of Sigma Designs
Côr Home Automation is not responsible for products and services offered by other companies.
The images, product information and specifications listed in this document are subject to change.