



HVAC Controls

Zoning & Specialty Controls Catalog

888.359.0362

www.iohvaccontrols.com

Volume 4


Temp-Stat™

Temporary Construction Thermostat

iO-TSXX

iO-CLXX

This temporary construction thermostat is preset to a non-adjustable temperature. Saves on energy costs during construction.

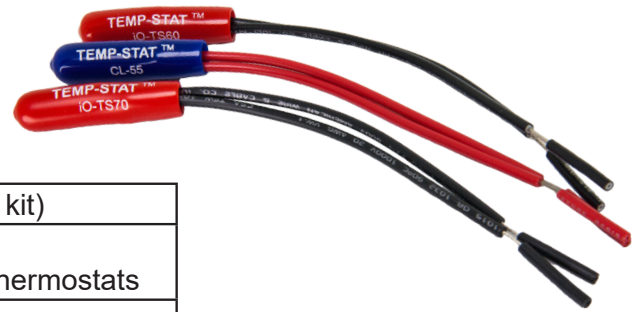

Specifications:

Input Voltage	24VAC, 1A (line voltage control requires a relay kit)
Heating Only	41° F warehouse thermostat 55° F, 60° F, 65° F, 70° F, 75° F construction thermostats
Cooling Only	55° F compressor lockout thermostat 70° F, 75° F, 80° F construction thermostats

Warranty: 1 year

PART NUMBER	TEMPERATURE SETTING	DESCRIPTION
iO-TS60	60°	Heating application
iO-TS65	65°	Heating application
iO-TS70	70°	Heating application
iO-CL70	70°	Cooling application
iO-CL75	75°	Cooling application

Special Application Thermostats

PART NUMBER	TEMPERATURE SETTING	DESCRIPTION
iO-TS41	41°	Heating application
iO-TS55	55°	Heating application
iO-CL55	55°	Compressor lock-out

Conceal-A-Stat™

Flush-Mounted, Tamper-Resistant Thermostats

iO-CSXXWP

iO-CSACXXWP

This concealed thermostat is designed to control unit heaters, cabinet heaters, in-wall heaters, fan coils or air conditioning units. Common applications include locker rooms, entryways, warehouses and hallways.



Specifications:

Input Voltage	24VAC, 1A (line voltage controls requires a relay kit)
Heating Only	41° F, 60° F, 65° F, 70° F
Cooling Only	70° F, 75° F

Warranty: 1 year

PART NUMBER	TEMPERATURE SETTING	DESCRIPTION
iO-CS41WP	41°	Heating application
iO-CS60WP	60°	Heating application
iO-CS65WP	65°	Heating application
iO-CS70WP	70°	Heating application
iO-CSAC70WP	70°	Cooling application
iO-CSAC75WP	75°	Cooling application

Accessories

PART NUMBER	DESCRIPTION
iO-CSRY120	Relay kit for 120 volt control circuits
iO-CSRY240	Relay kit for 240 volt control circuits