


Temp-Stat™ - Temporary Construction Thermostat

This temporary construction thermostat is preset to a non-adjustable temperature. Ideal for saving on energy costs during construction.

Warranty: 1-year

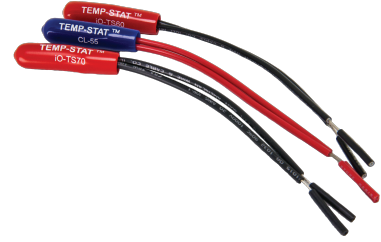

Temp-Stat vs. Competitors

- Patented and manufactured since 1997
- A capacitor absorbs arc when the contacts open and close. This eliminates the production of heat which can cause the equipment to short cycle.
- Plastic cover also prevents short cycling of equipment by slowing the thermostat response time down
- Bi-metal gold flash contacts
- Two tests done on the bi-metal component and sorted by temperature at the factory
- Two more tests done in-house to ensure temperature differential is accurate
- Approximately 1.5° temperature differential

Specifications:

| | |
|----------------------|--|
| Input Voltage | 24VAC, 1A or line voltage when used with a relay kit |
| Heating Only | 41° F warehouse thermostat 55° F, 60° F, 65° F, 70° F, 75° F construction thermostats |
| Cooling Only | 55° F compressor lockout thermostat 70° F, 75° F, 80° F construction thermostats |

Conceal-A-Stat™ - Flush-Mounted, Tamper-Resistant Thermostat

This concealed thermostat is designed to control unit heaters, cabinet heaters, in-wall heaters, fan coils or air conditioning units. Common applications include locker rooms, entryways, warehouses and hallways.

Warranty: 1-year

Specifications:

| | |
|----------------------|--|
| Input Voltage | 24VAC, 1A or line voltage when used with a relay kit |
| Heating Only | 41° F, 60° F, 65° F, 70° F |
| Cooling Only | 70° F, 75° F |



5351 East Thompson Road Suite 142
Indianapolis, IN 46237
P: 888.359.0362
F: 317.489.5204
info@iOhvacsystems.com
www.iOhvacsystems.com

