



# WARDFLEX® Couplings

Ward Manufacturing, LLC.

117 Gulick Street  
 Blossburg, PA 16912  
 Tel. (800)248-1027  
 www.wardmfg.com

## Description:

The 3/8" thru 1-1/4" WARDFLEX® tubing is terminated using the patented, STEPSAVER double seal fitting. The 1-1/2" and 2" tubing utilize the WARDFLEX® traditional gasketed fitting design. Only fittings designed and listed for use with the WARDFLEX® and WARDFLEX® MAX CSST Piping Systems shall be used when connecting to the flexible piping.

## Features:


- Approved for concealed use
- One corrugation crush seal
- Reusable
- 3/8" through 1-1/4" patented STEPSAVER fittings
  - Primary metal to metal seal
  - Secondary gasket seal
- 1-1/2" and 2" fittings
  - Reliable gasket seal

## Components:

- Coupling Body
- Retainer Rings (2)
- Nuts (2)
- Gaskets (2)

## Listings:

- CSA: File# 112940\_0\_000
- IAPMO: File# 3353
- ICC: Report# ESR-1879

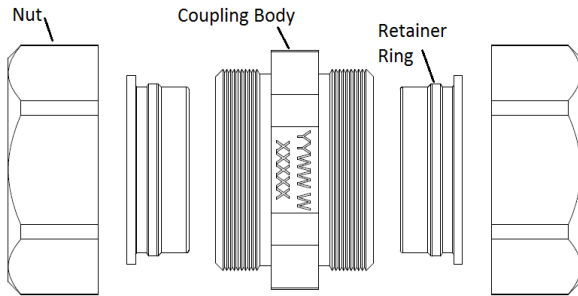

## Technical Data:

### General

Certified Operating Pressure	25 psi
------------------------------	--------

### Material

Body, Retainer Ring, & Nut	Brass
Gasket	Composite Fiber

### Dimensions

Price Sheet Item #	CSST Size	Assembled Length	Nut Hex	Coupling Hex	Maximum Tightening Torque (ft-lbs)	Approximate Weight (lbs)
260	3/8"	1.568"	1-1/16"	1-1/16"	50	0.33
261	1/2"	1.504"	1-3/16"	1-1/16"	50	0.34
262	3/4"	1.656"	1-1/2"	1-1/2"	120	0.57
263	1"	1.804"	1-3/4"	1-3/4"	160	0.83
264	1-1/4"	2.220"	2-1/4"	2-1/4"	200	1.67
265	1-1/2"	2.964"	3"	3"	200	3.99
266	2"	3.390"	3-1/2"	3-1/2"	200	5.47

Revision Date  
 June 16, 2015  
 Rev. 02