



HOME AUTOMATION

The heart of a smarter home.

Welcome to
Côr™ Home Automation.
This Quick Start Guide
will help you get your
new system up and
running smoothly.



INSTALLING THE CÔR™ HOME AUTOMATION APP

Download and install the free app from the App Store or Google Play
on your mobile device by searching for “Cor Home Automation.”



IMPORTANT INFORMATION FROM INSTALLER:

Hub Serial Number
(12 digits)

Passcode
(8 digits)

1 ADDING A SITE

This feature allows you to add locations such as vacation homes, apartments, etc.

You will need a Cór™ Hub for each location.

To add a new location:

From the Home Screen, press the drop-down menu in the upper left of the screen.

Select “Sites.”

On the My Sites Screen, press “Add +” at the top right. A new screen will appear.

Continue to Step 2.

2 SETTING UP YOUR SITE

This is the section where you set up your location on the app.

Fill out each field on the screen as follows:

Site Name:

Here you name the location where your system will be operating. For example: “Home,” “beach house” or “lake house.”

Description:

This field allows you to add additional information. For example: “Hallway” or “Master Bedroom.”

Serial Number:

This is the 12-digit number provided by the installer and listed on the front of the guide.

Passcode:

The 8-digit number listed on the front of the guide and provided by the installer.

User Name:


The initial User Name is “User 1” and is case-sensitive. (Be sure to add the space after “User.”)

PIN:

Your initial PIN is 1234.

You can update the User Name and PIN by following the directions in the next section of this guide.

After all fields are completed, hit “Done.”

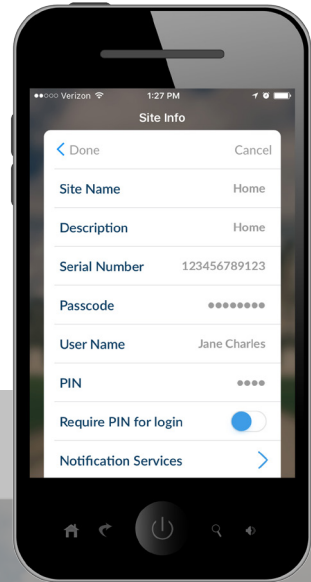

Main House

House is disarmed.

Smoke detector battery is low.

3 CHANGING YOUR USER NAME AND PIN


To get started, log in to the site that you just created and select the drop-down menu in the upper left of the Site Home Screen.

Select “Users.”

From the Configure Users Screen, you can change your User Name and PIN as desired, or just your PIN.

Once you’ve made your changes, press “Done” at the top left of the screen.

Tap Back to Sites to return to the main My Sites screen.

Tap on the  on the right side and update the user name and PIN previously entered i.e. User 1 and 1234.

4 ADDING A USER

This feature allows you to provide access to other occupants of your home, such as family members or people who need access at specific times (e.g., housekeepers or handymen).

To add a user:

From the Main Menu drop-down, select “Users.”


On the Configure Users Screen, press “Add.”

Make sure “User Type” is set to something other than “Master.”

Fill out the fields shown to add a new user.

Press “Save” when finished.

Provide new users with their User Names and PINs.

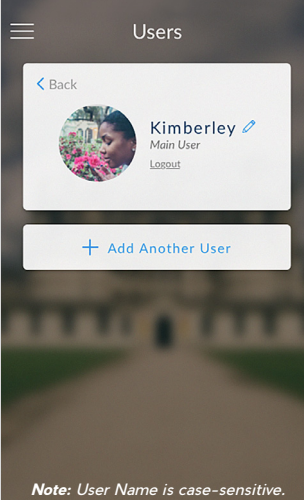

New users must install the Côr Home Automation app on their smart devices to access the system. Two users cannot have the same PIN.

5 NAVIGATING THE SMART HOME APP

You can control a wide range of functions and devices through the app. The Côr™ system is highly customizable and expandable depending on your needs and preferences. See the screen below for a preview:



AN UPDATED LIST OF CURRENTLY AVAILABLE FUNCTIONS AND DEVICES CAN BE FOUND AT CORHOMEAUTOMATION.COM.

6 ARMING AND DISARMING YOUR SYSTEM

You can easily arm or disarm your system by using the app.

Should your smart device be inaccessible, you can also arm or disarm the system by entering your PIN on the Côr Hub.

In either case, start by entering your PIN, and then press “Enter.”



System Arming Modes

Mode	Description	Steps
Arm Away	System alarms if an active sensor is tripped and correct PIN is not entered	Hit “Arm Away” once
Arm Stay	System arms after a programmed time delay into stay mode	Hit “Arm Stay” once
Arm Stay - Instant	System arms instantly into stay mode	Hit “Arm Stay” 2 times
Arm Stay - Night	System arms into stay mode Perimeter sensors alarm instantly with no delay	Hit “Arm Stay” 3 times
Disarm	System disarms	Hit “Disarm”

7 ADDING A Z-WAVE® DEVICE

From the Site Home Screen, press the drop-down menu in the upper-left corner.

Press “Settings.”

From the drop-down menu under “Settings Selector,” select “Z-Wave Room Names.”

In the field under “Z-Wave Room Editor,” type in the name you want to assign to this device. For example: “Front Door” or “Dining Room Lamp.”

After entering, press “Save.”

Next, under “Setting Selector,” go to “Z-Wave Add/Remove.”

Press “Add” under “Device Add/Remove Functions.”

Next, press the “Activate” button on the Z-Wave® device.

The Côt™ Hub and Z-Wave device should begin communicating, and the device ID will appear under “Z-Wave Device Selector.”


Press “Save” when finished.

Note: If a device does not add on the first attempt, remove it within the app before trying to add it a second time.

Z-Wave® is a registered trademark of Sigma Designs.



8 ADDING A SUPPORTED WI-FI® THERMOSTAT

On the My Sites main screen, press the  button in the upper right of the screen.

On the next screen, tap on “Add Other Smart Devices” and slide the button next to the thermostat that you wish to pair to the system.

This will open the Authorize App Screen.


Enter the user name and password you have set up for your Wi-Fi® thermostat. Accept terms to complete setup.

To view your thermostat and settings, enter the site from the App Home Screen.

Thermostat functions will be viewable on the “Thermostat” tab.

Wi-Fi® is a registered trademark of the Wi-Fi Alliance Corporation.

9 ADDING NOTIFICATIONS

On the App Home Screen, press the  button in the upper right of the screen.

On the next page, select “Notification Services.”

Slide the button next to “Push Notifications” to begin receiving notifications on your smart device from Côt Home Automation when app is not in use.

Select the Events you would like to receive notifications about, and then press “Save.”

FOR HELP AND QUESTIONS

Dealer Contact Info:

Name:

Telephone Number:

Further help is always available
at corhomeautomation.com
or (844) My-Cor-Home.