



MECHANICAL TYPE FASTENERS

SAH DYNASTICK® SELF ADHESIVE INSULATION HANGER


All Dynastick hangers are sold with a washer.

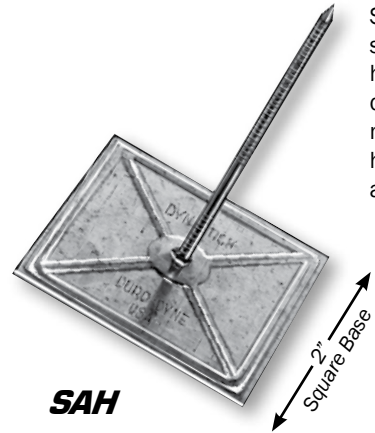

SAH Dynastick is an insulation hanger with a self-stick base. Just peel the release paper from the hanger base and firmly press the base to the clean duct surface. Impale the insulation over the hanger nail and slip on the locking washer. Self-stick hangers adhere to clean metal surfaces and withstand temperatures of up to 175 °F.



LPC1
Galvanized Steel Washer

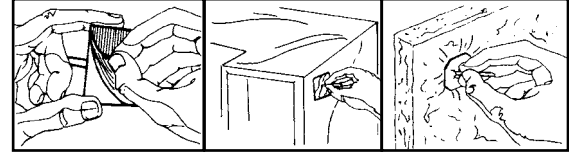

PEEL OFF PROTECTIVE PAPER


PRESS PIN FIRMLY TO SURFACE

IMPALE THE INSULATION AND PRESS DOWN WASHER OVER PIN


Item#	Bulk#	Code/Bulk Code	Hanger Size	Quantity
26067	26036	SAH34/ SAHB34	3/4in	1 TH/ 500
26068	26037	SAH114/ SAHB114	1-1/4in	1 TH/ 500
26069	26040	SAH134/ SAHB134	1-3/4in	1 TH/ 500
26070	26041	SAH200/ SAHB200	2in	1 TH/ 500
26071	26047	SAH250/ SAHB250	2-1/2in	1 TH/ 500
n/a	26126	SAHB350	3-1/2in	500
n/a	26127	SAHB450	4-1/2in	500

PBH DYNASTICK® INSULATION HANGER


All Dynastick hangers are sold with a washer.

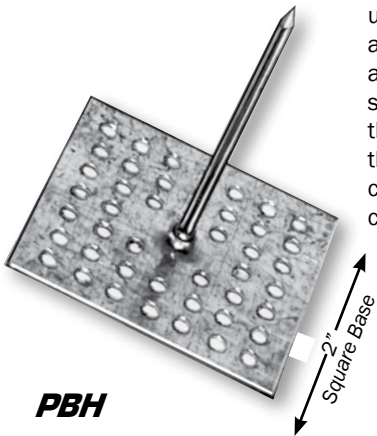

PBH Dynastick is a perforated base hanger for use with super strength PBA mastic. Simply place a small amount of PBA on a perforated base and firmly press the hanger against the duct surface. Allow the PBA mastic to dry, then, impale the insulation over the hanger nail and slip on the locking washer. Duro Dyne PBA adheres to concrete, metal or wood surfaces and withstands constant temperatures up to 180 °F.



LPC1
Galvanized Steel Washer

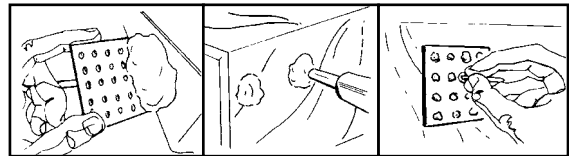

APPLY ADHESIVE WITH FLAT EDGE

OR APPLY ADHESIVE WITH CAULKING GUN

PRESS PIN FIRMLY TO SURFACE

Item#	Bulk#	Code/Bulk Code	Hanger Size	Quantity
26075	26097	PBH34/ PBHB34	3/4in	1 TH/ 500
26076	26098	PBH114/ PBHB114	1-1/4in	1 TH/ 500
26077	26099	PBH134/ PBHB134	1-3/4in	1 TH/ 500
26078	26100	PBH200/ PBHB200	2in	1 TH/ 500
26079	26101	PBH250/ PBHB250	2-1/2in	1 TH/ 500
n/a	26128	PBHB350	3-1/2in	500
n/a	26112	PBHB450	4-1/2in	500

PBACZVOC DYNASTICK® ADHESIVE


PBACZVOC contains Zero VOC and is ideal for use with PBH Dynastick Hangers. Place a small amount of PBACZVOC on a perforated base and firmly press the hanger against the duct surface. Allow the PBACZVOC mastic to dry, then, impale the insulation over the hanger nail and slip on a locking washer. Duro Dyne PBACZVOC adheres to concrete, metal or wood surfaces and performs in Temperatures Up To 225 °F.



Item#	Code	Quantity
5143	PBACZVOC	24/ctn

LPC1 GALVANIZED STEEL WASHER

LPC1 washers are included with most mechanical type fasteners. However, they can also be purchased separately.



LPC1

Item#	Bulk#	Code/Bulk Code	Quantity
26115	26093	LPC1/ LPC1B	100/ 500